



Ecopure Pro1-H Whole House Filter

INSTRUCTIONS

Fit the filters in a vertical position to the feed pipe for the existing tap that is going to be used for filtered water, or the new tap line if purchased with a new tap kit. (note that the flow sequence is the ceramics filter followed by the carbon filter) use the mounting brackets provided and allowing the bowls enough clearance to be unscrewed for maintenance procedures. Avoid areas prone to freezing, and take note of the **INLET** port. It is advisable to have isolation valves either side of the unit and consider a bypass loop for servicing. BSP male Push fit or compression fittings can be used (ensure threads are wound with PTFE tape) do not use pipe sealant. The filter is pre assembled, if cartridge needs replacement or examination isolate from mains pressure, unscrew the blue bowl and drop the bowl and cartridge from the headstock, when refitting use silicone grease (WRAS approved) on the O ring around the bowl and make sure it is seated correctly for a water tight seal.

TECHNICAL INFORMATION

Ideal for pipe work up to 22mm diameter, 15 mm adaptors can be purchased if needed. Drink filtered water from your existing tap or optional dedicated faucet. No need for filter jugs. Unit will remove or reduce toxins, heavy metals, hormones and fluoride. Effective at killing and containing bacteria in water such as E-coli, Pseudomonas etc. Provides reduced non-scaling water for kitchen and bathrooms. Produces Hydrogenated pH enhanced water with minerals and increased alkalinity. Increases anti-oxidants in the water too. Merely replace cartridge at end of life at low cost.

The filtration comprises of -

1 x Ecopure **H+** Ceramics Filter - 3 year filter life. Life of filter may vary depending on water hardness and local water quality.







1 x 2.5 x 10" Aquatidyne Carbon block Filter - filter life 36- months depending on particulate capture

Max Flow rate: 20 litres per minute.

Housing and cartridge - WRAS approved. The material of the spheres is approved by the Water Research Centre under the Water Bylaws scheme for use in contact with potable water. NSF approval has also been granted. The active ceramic media has been tested by South West Water Laboratories for microbiological removal and certified for bacterial removal.

filter assembly

use PTFE tape on all threaded connector joints and silicone grease on sump bowl o-rings

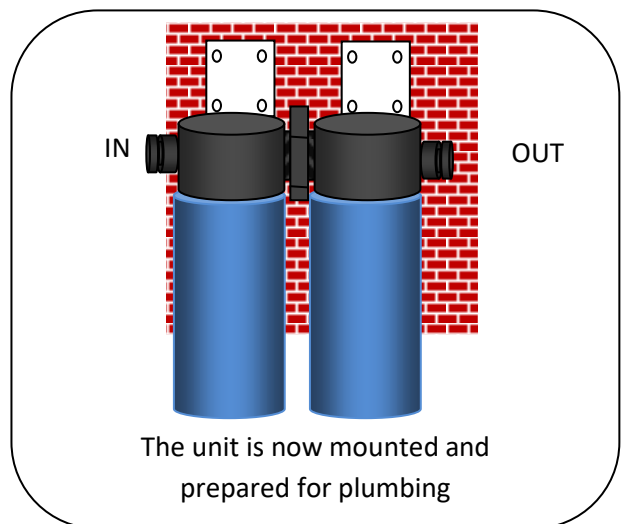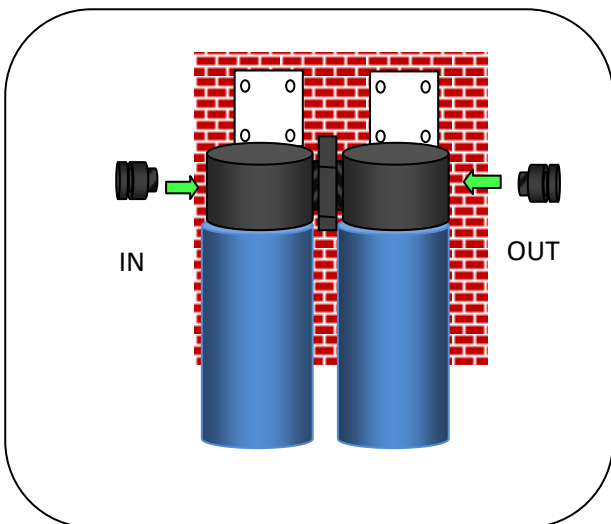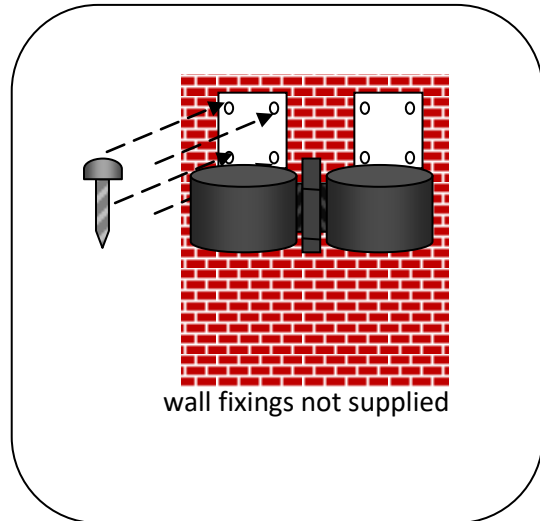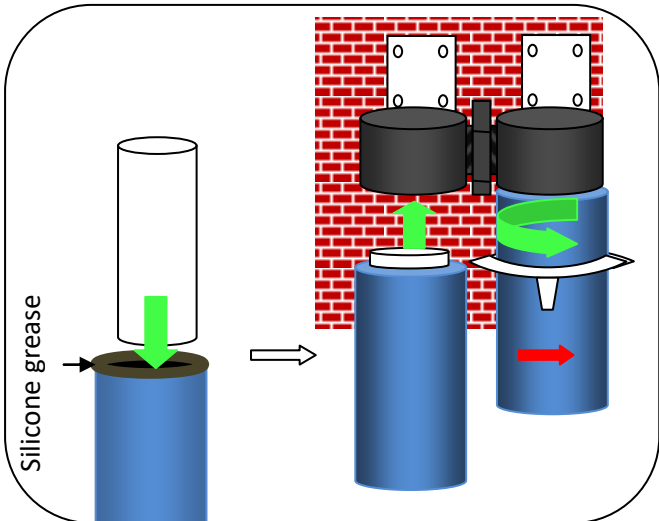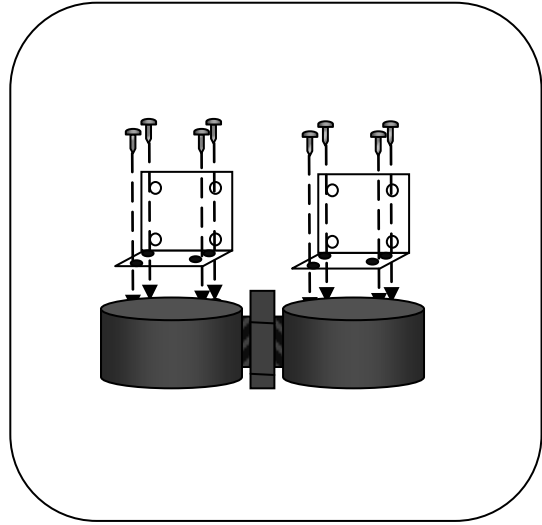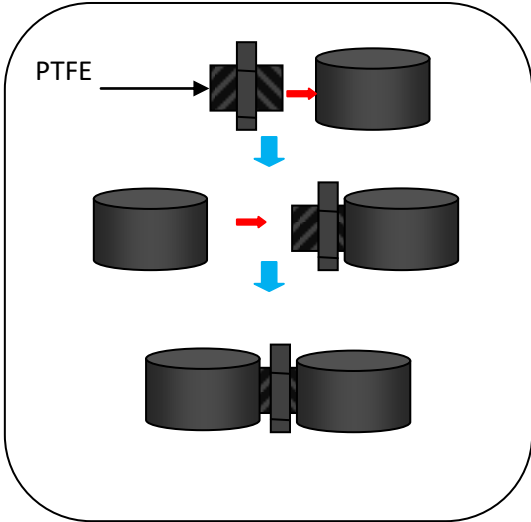

FILTER KIT CONTENTS

2 x filter housing 2.5x10

1 x Carbon fibre block Cartridge 2.5x10

1 x Ceramics Cartridge 2.5x10

2 x housing mounting bracket and screw sets


1 x filter spanner

1 x BSP nipple connection 3/4"-3/4"

2 X 22mm to 3/4 "BSP male push fit pipe connection

1 x Instructions

PLUMBING CONNECTION

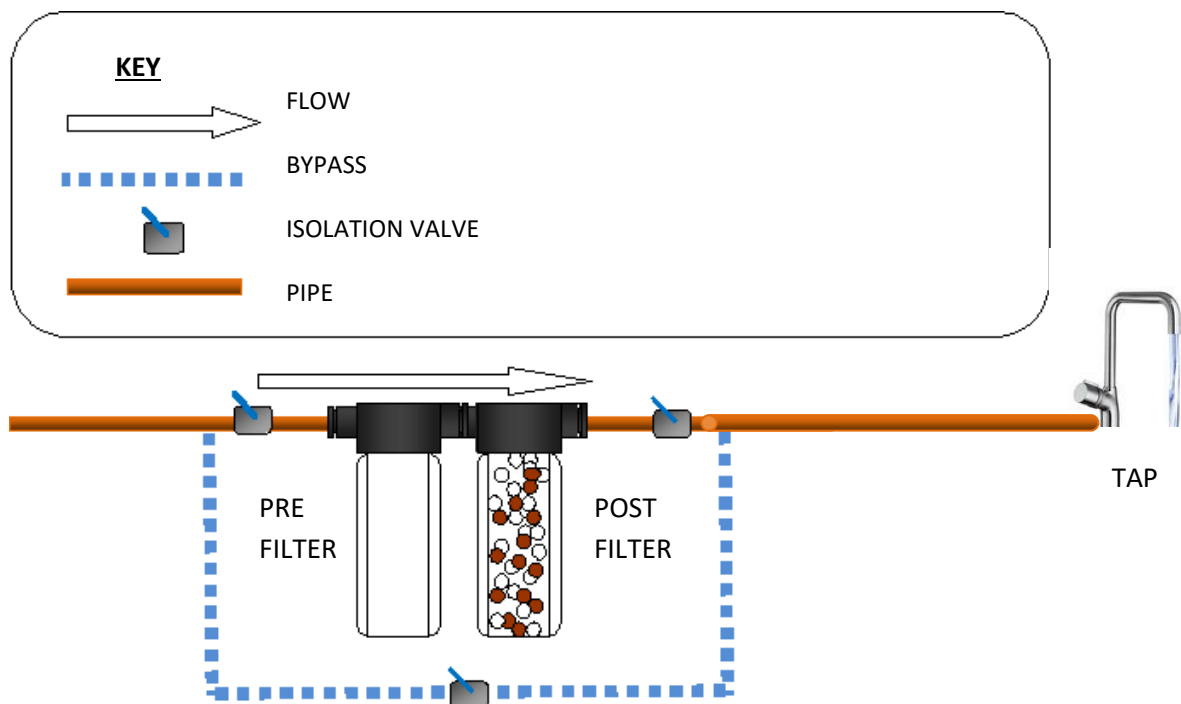

CARTRIDGE CHANGE RECORD

INSTALLATION DATE	PRE FILTER	POST FILTER
	N/A	N/A
1 ST YEAR		
	N/A	N/A
2 ND YEAR		
	N/A	N/A
3 RD YEAR	Change due	Change due
4 TH YEAR		
	N/A	N/A
5 TH YEAR		
	N/A	N/A
6 TH YEAR	Change due	Change due

