

ADVICE ON DIFFERENT LAYOUTS FOR THE FILTERS TO BEST SUIT SOME IRREGULAR TYPES OF SPACE

Please not with any altered layout the feed and return must originate and return to the plumbing after the stopcock inside the property before it distributes around the home, filter sequence must remain the same and filters must mount vertically.

Connected altogether as shown on the website

the PUREAU 1H is

DIMENSIONS: H 428/ W 504/ D 150 (mm).



the ECOPURE PRO3H is

DIMENSIONS: H 470/ W 500/ D 215 (mm).



the PUREAU 2H is

DIMENSIONS: H 470/ W 585/ D 215 (mm).



the ECOPURE PRO4H is

DIMENSIONS: H 689/ W 500/ D 215 (mm).



the PUREAU 3H is

DIMENSIONS: H 700/ W 690/ D 215 (mm).



However by buying additional connections and pipe the vessels can be separated into alternative locations to get around obstacles or fit in awkward spaces, however remember that ease of access for servicing will be required so burying the unit in a corner of a kitchen void might make access awkward for cartridge changing, especially as one of the cartridges needs a 3 month change.

The individual canister dimensions

The thinner canisters as in the **PUREAU1/1H** and the outer vessels on a **PUREAU 2/2H** are
DIMENSIONS: H 327/ W 129/ D 150 (mm)

The fatter central canister as in the **PUREAU2/2H** and the outer vessels on a **PUREAU 3/3H** and **ECOPURE PRO3H** are
DIMENSIONS H 345/ W 185/ D 215 (mm)

The longer canister on a **PUREAU 3/3H** and **ECOPURE PRO4H**
DIMENSIONS H 609/ W 185/ D 215 (mm)


Allow 100mm for the mounting bracket although this can be inverted so just 30mm can be allowed for access to red button on vessel top

Allow 60mm clear space below vessel for sump removal during servicing


Allow 150-200 mm each side for plumbing connections to vessel

Below are some ideas in alternative fitments


Corner layout for 3 vessel systems

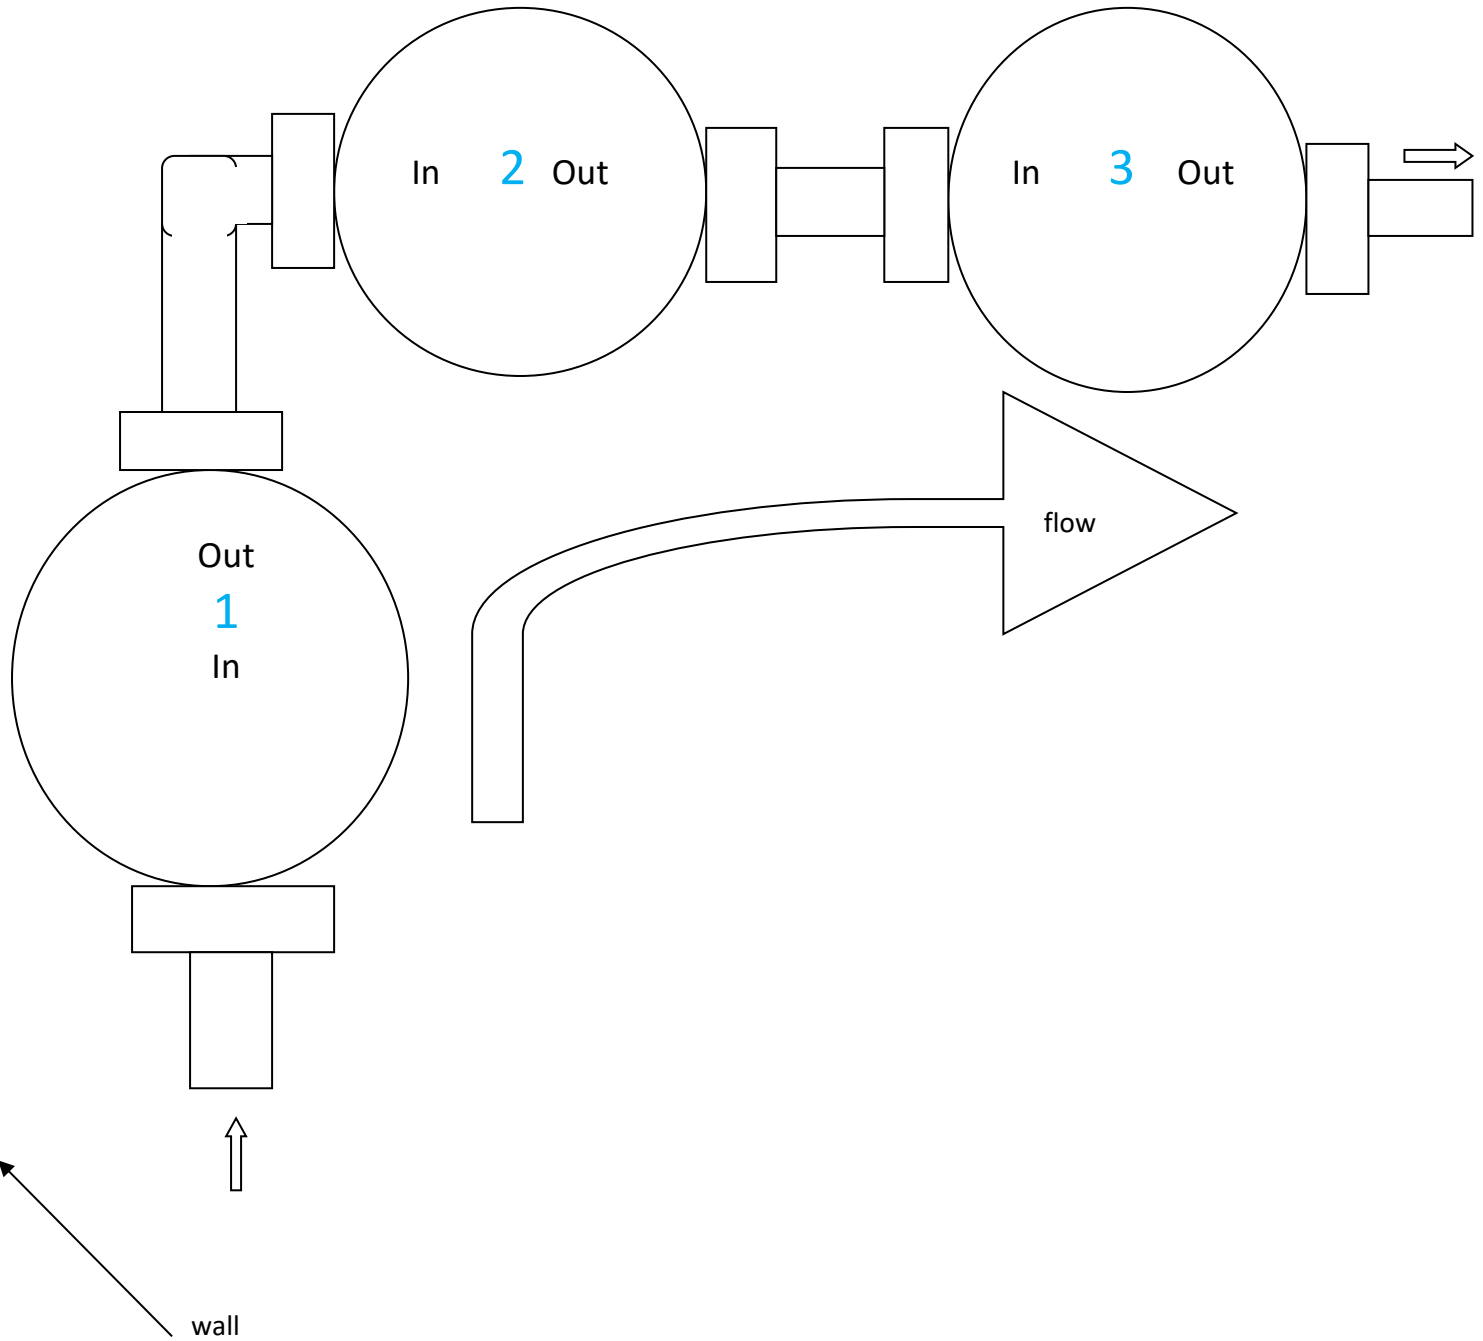


Fitting around an obstacle

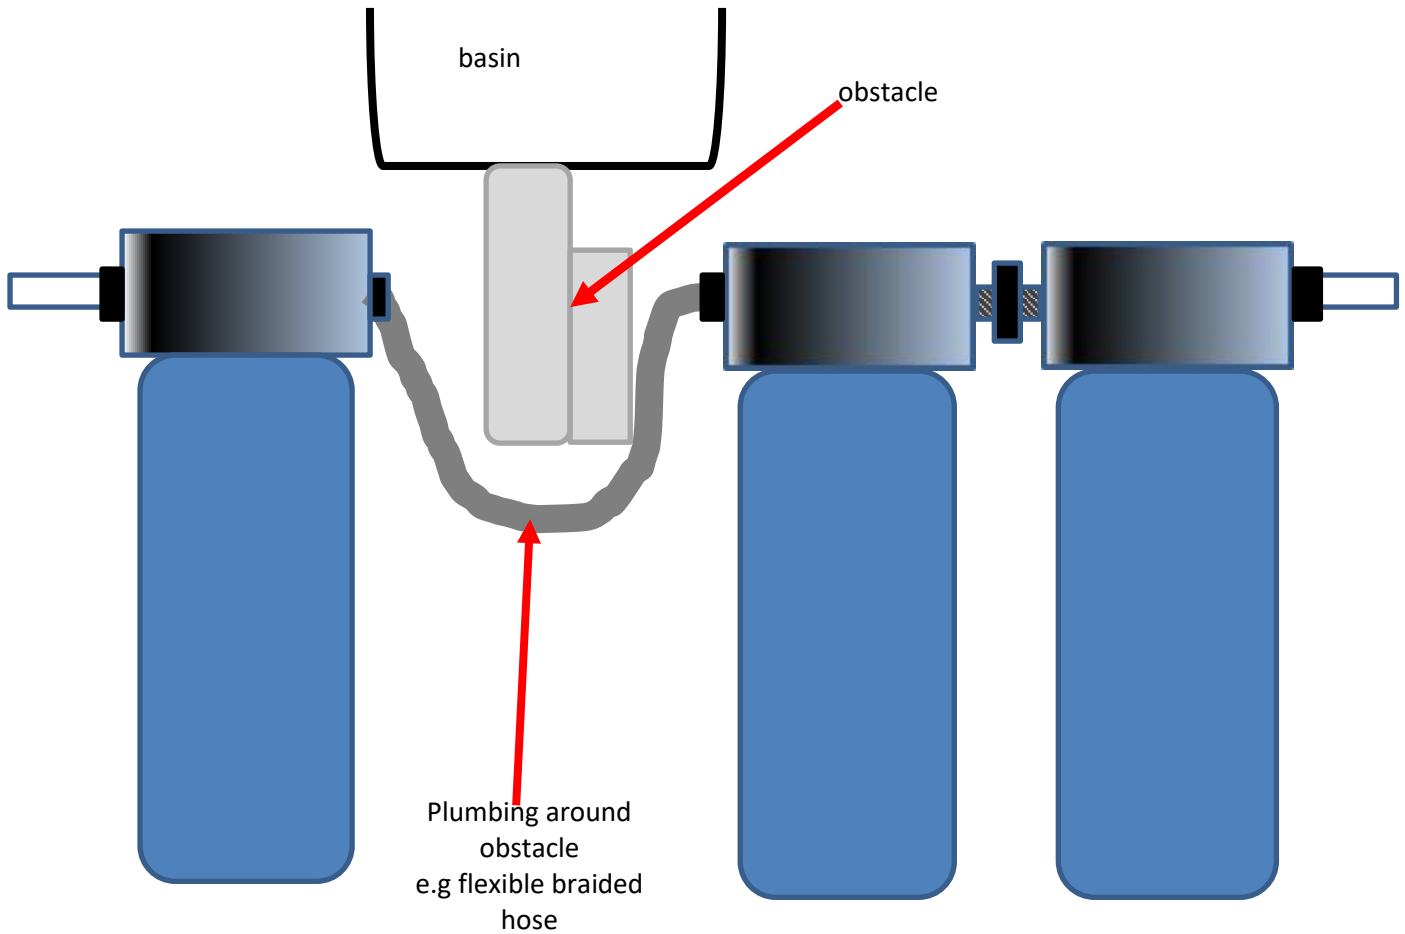

Remote locating a system

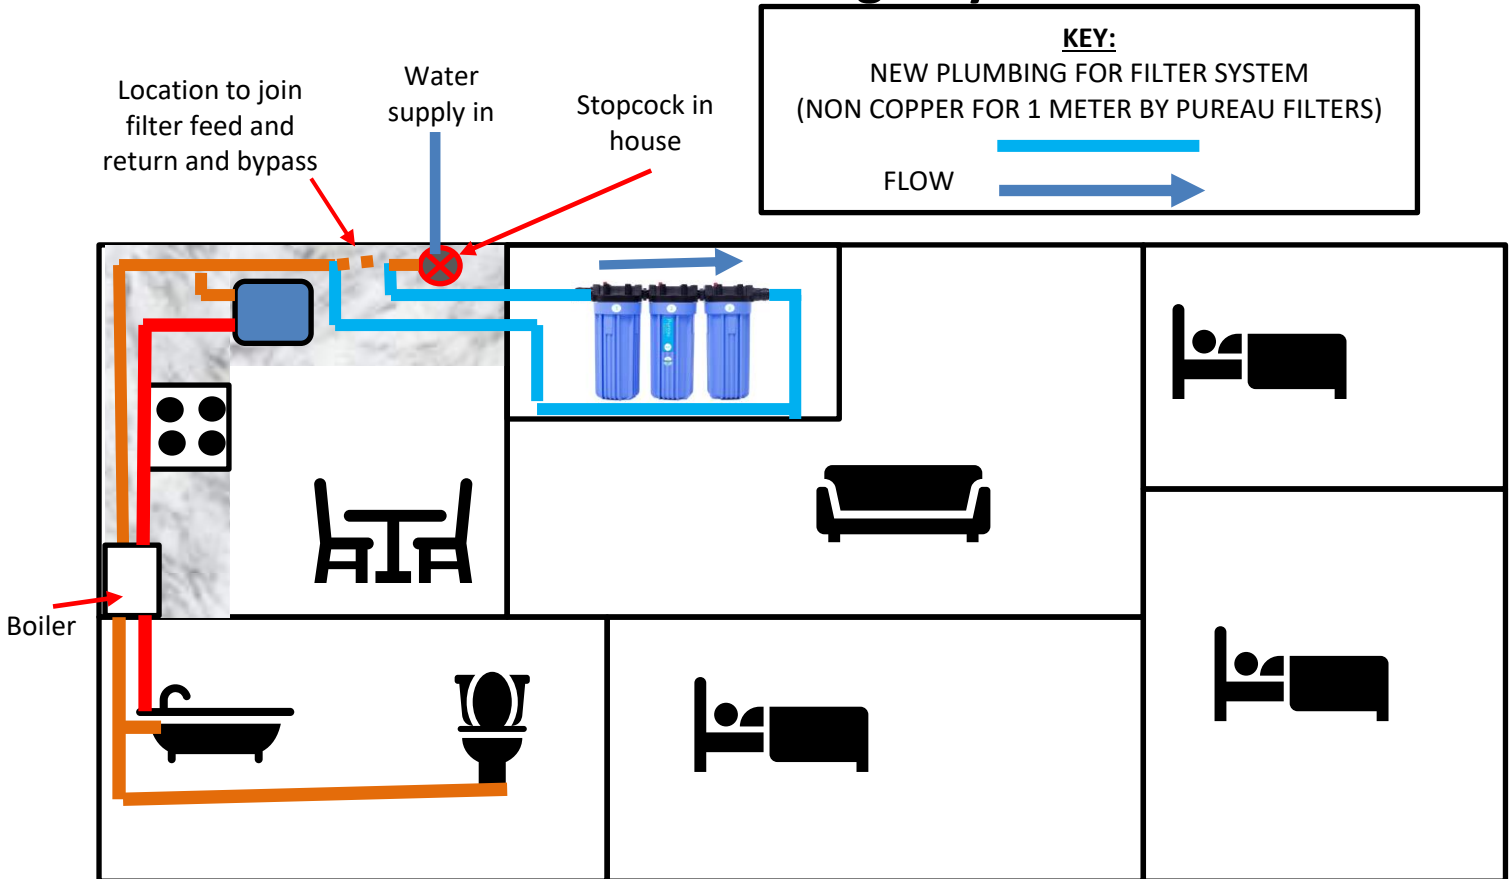

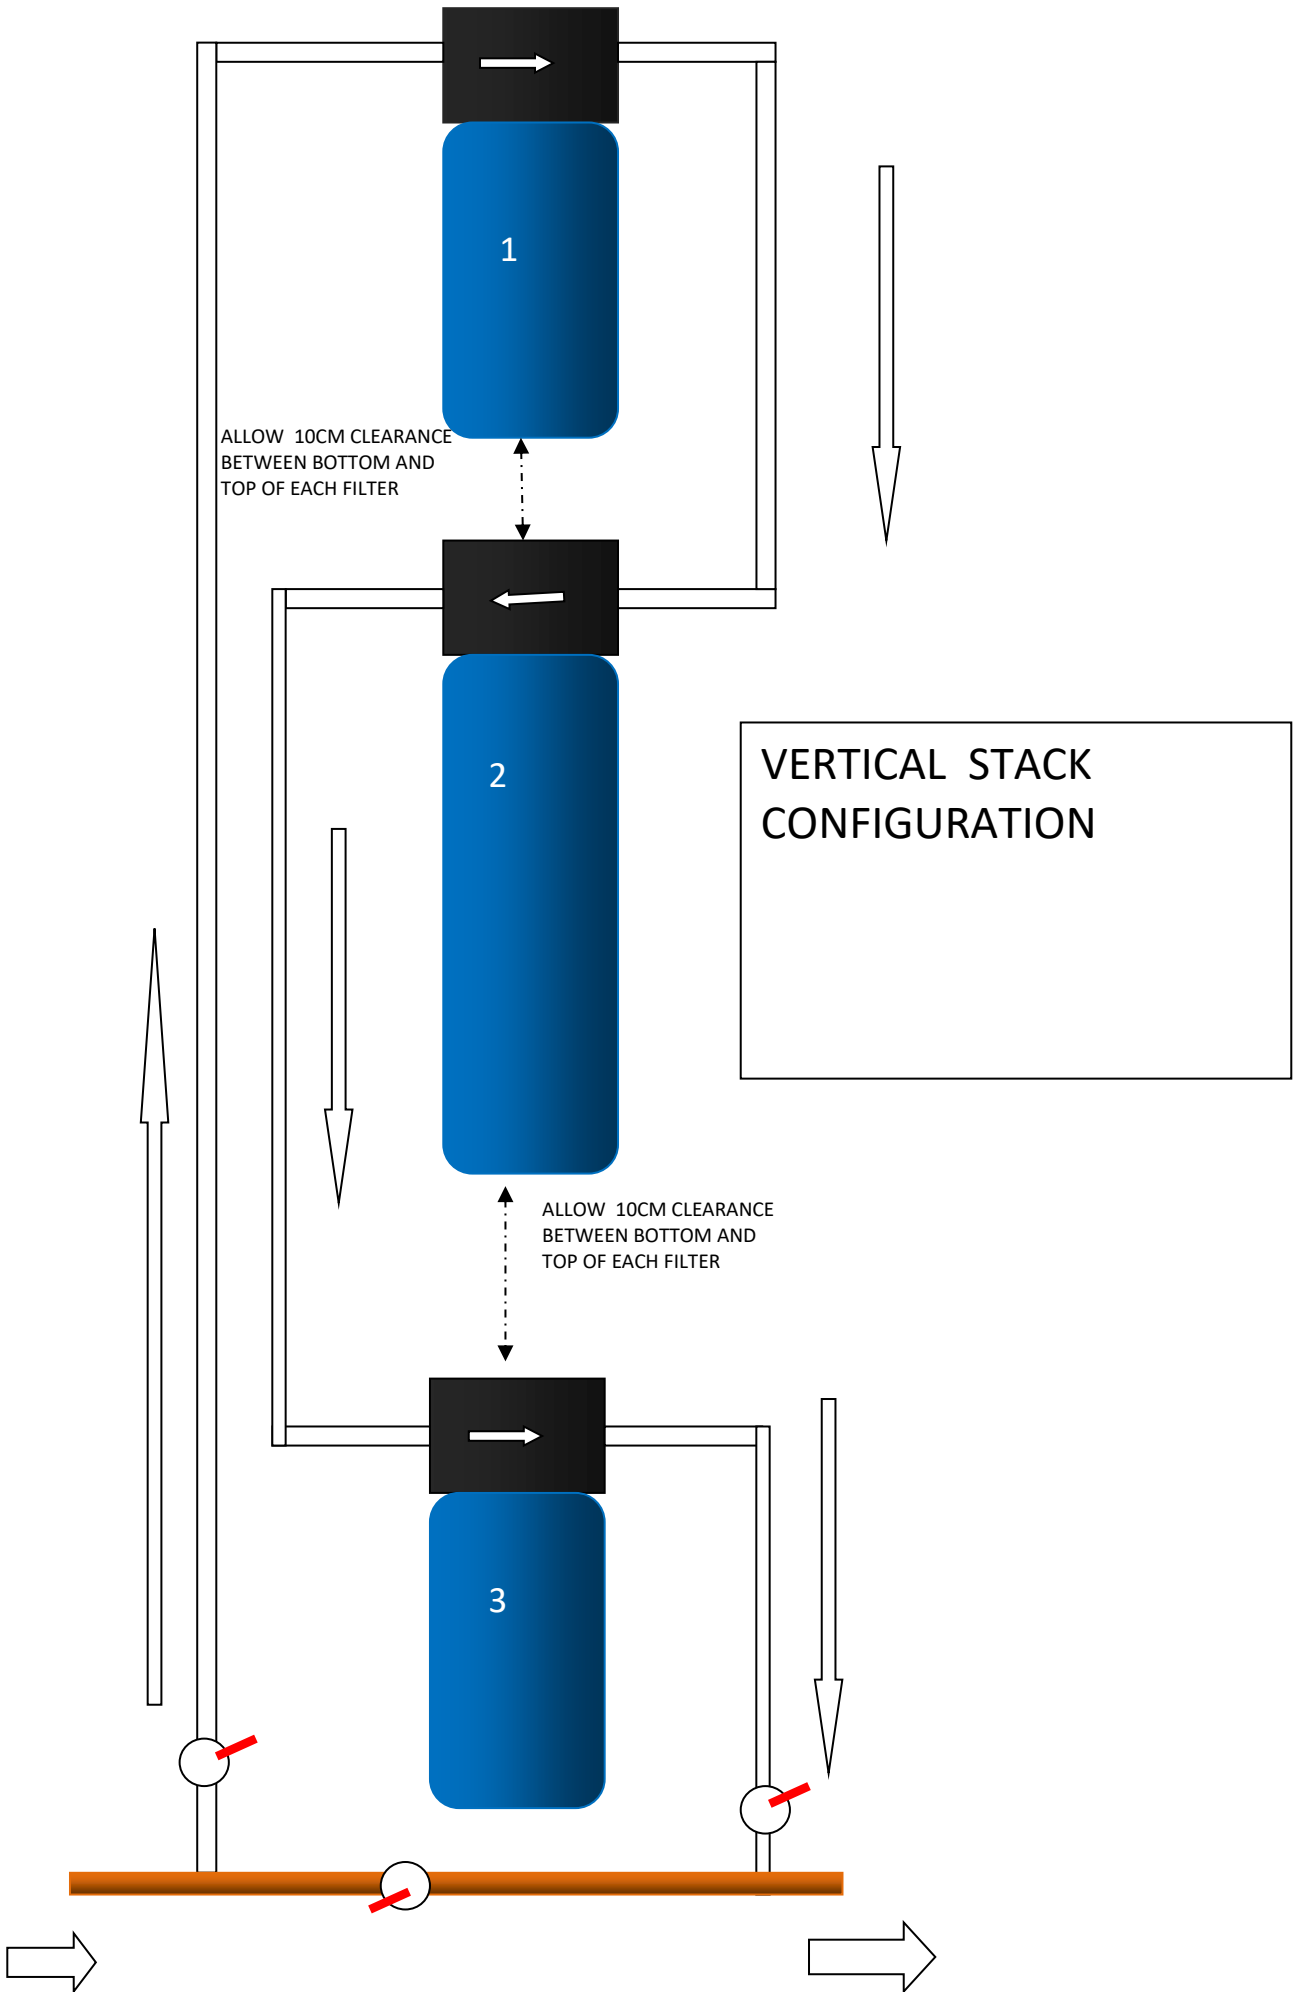

EXAMPLE OF A PUREAU 2 MOUNTED IN A 300MM CUPBOARD

